


CENTER POWER OUTLET SOCKET (for AC Power Supply)

COMPONENTS

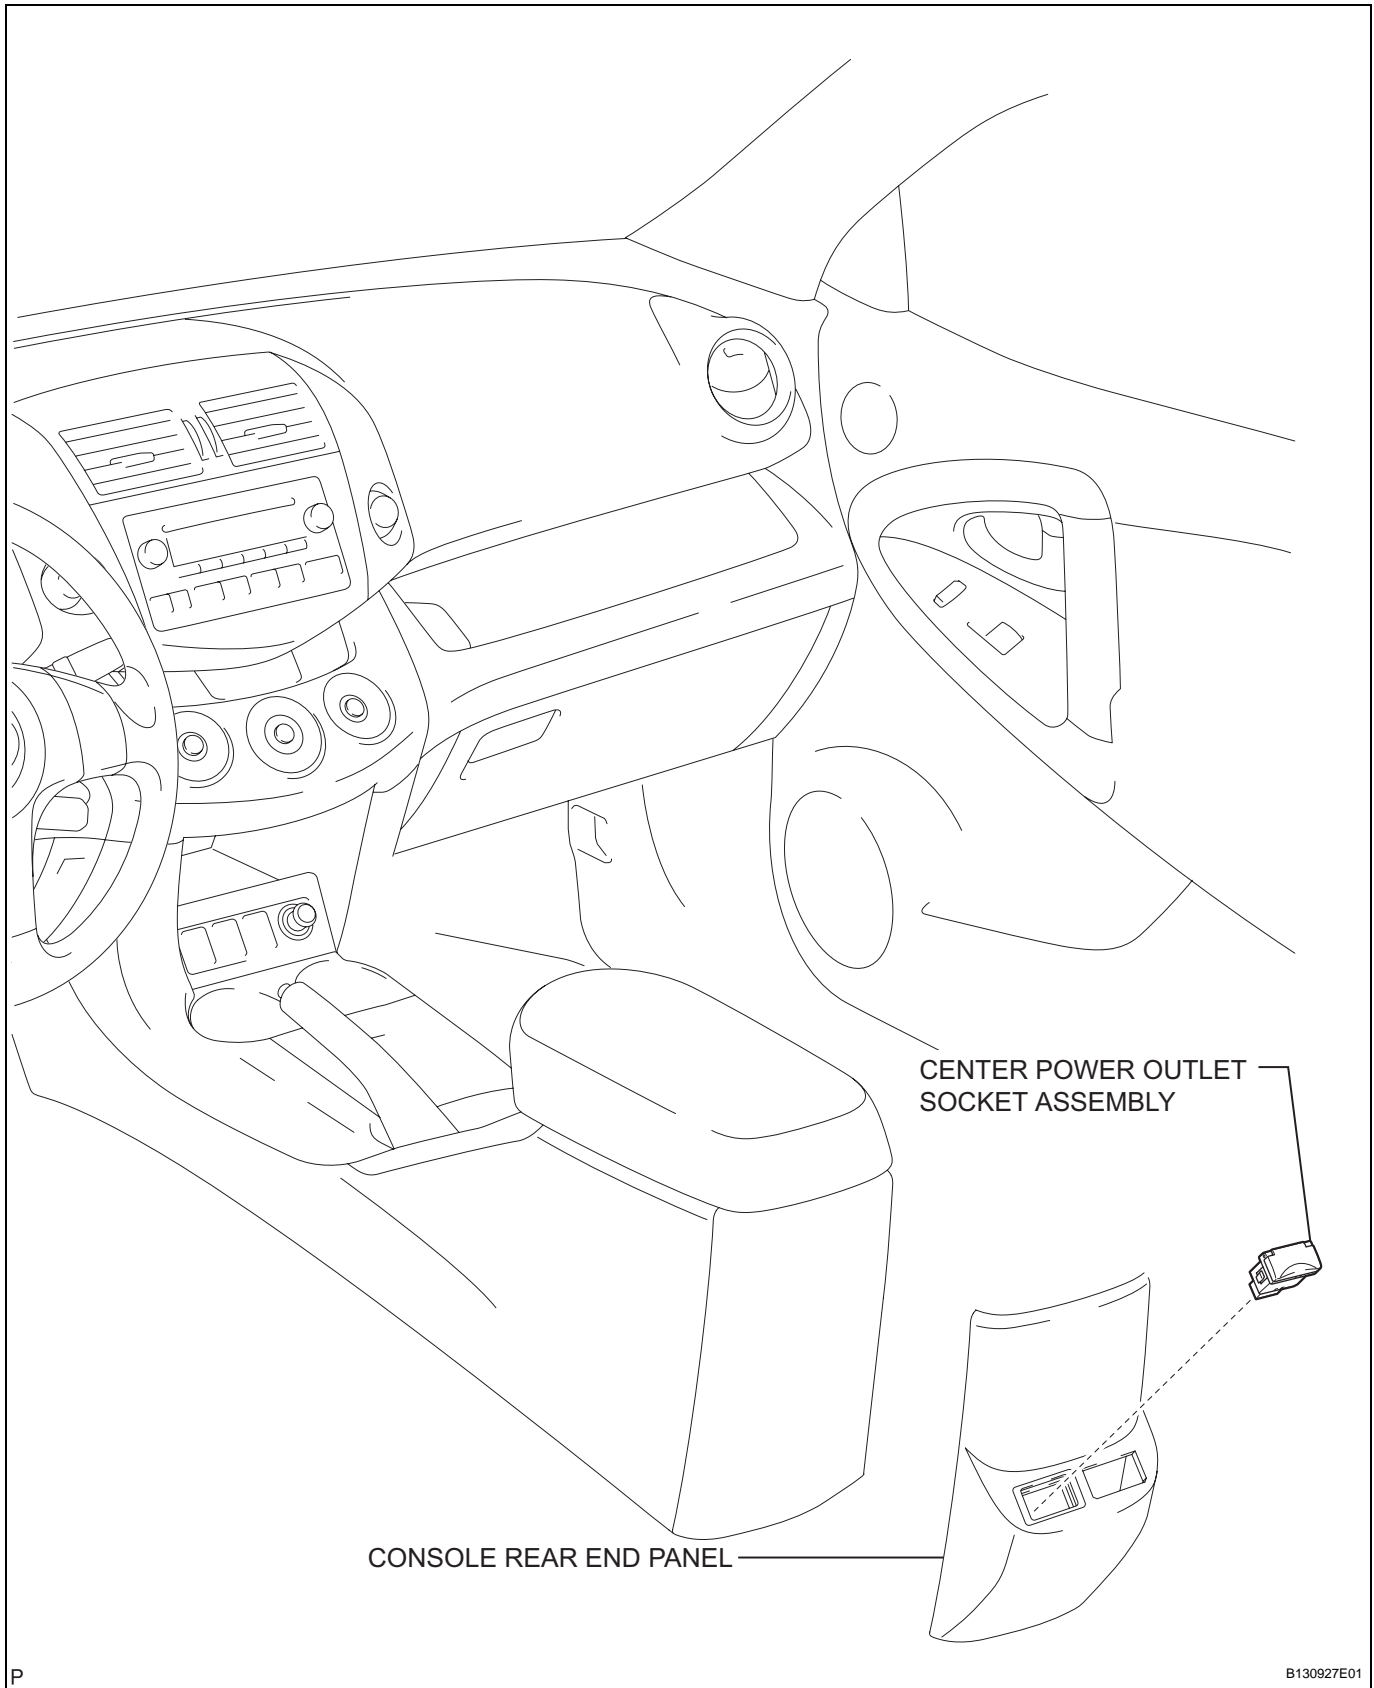



REMOVAL

1. **DISCONNECT CABLE FROM NEGATIVE BATTERY TERMINAL**

CAUTION:

Wait at least 90 seconds after disconnecting the cable from the negative (-) battery terminal to prevent airbag and seat belt pretensioner activation.

2. **REMOVE CONSOLE REAR END PANEL** (See page [IP-19](#))
3. **REMOVE CENTER POWER OUTLET SOCKET ASSEMBLY**
 - (a) Disconnect the connector.
 - (b) Detach the 2 claws and remove the power outlet.

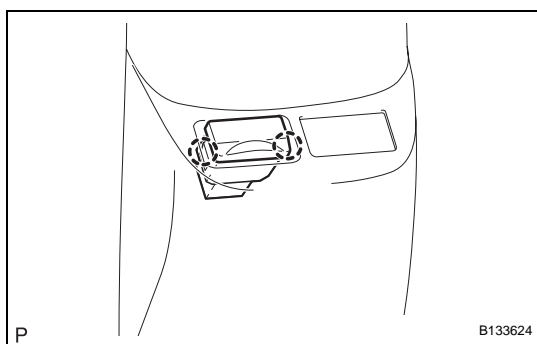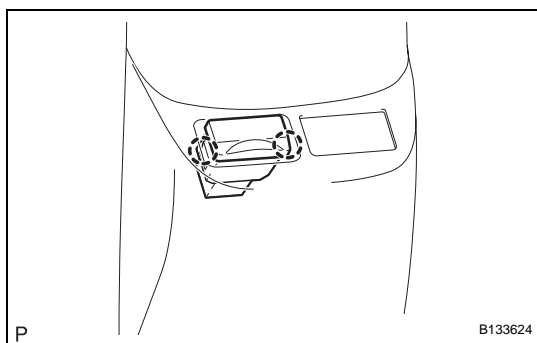

INSTALLATION

1. **INSTALL CENTER POWER OUTLET SOCKET ASSEMBLY**
 - (a) Attach the 2 claws to install the voltage inverter.
 - (b) Connect the connector.
2. **INSTALL CONSOLE REAR END PANEL** (See page [IP-27](#))
3. **CONNECT CABLE TO NEGATIVE BATTERY TERMINAL**